



PROFILE VIEW

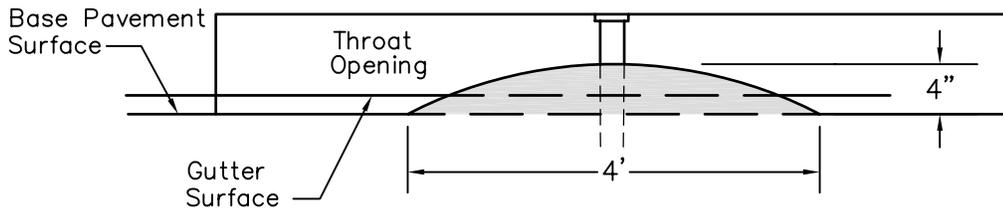

CROSS - SECTION

NOTES:

1. Dike shall be temporarily constructed of earth after installation of storm drain inlet. Once base pavement is installed, then dike is to be constructed of asphalt.
2. All dimensions shown are for streets less than 26' wide. For streets greater than 26' wide: Increase 4" dimension to 6" and increase 4' dimension to 6'.
3. Recommend painting dike yellow to alert motorists of dikes' existence.

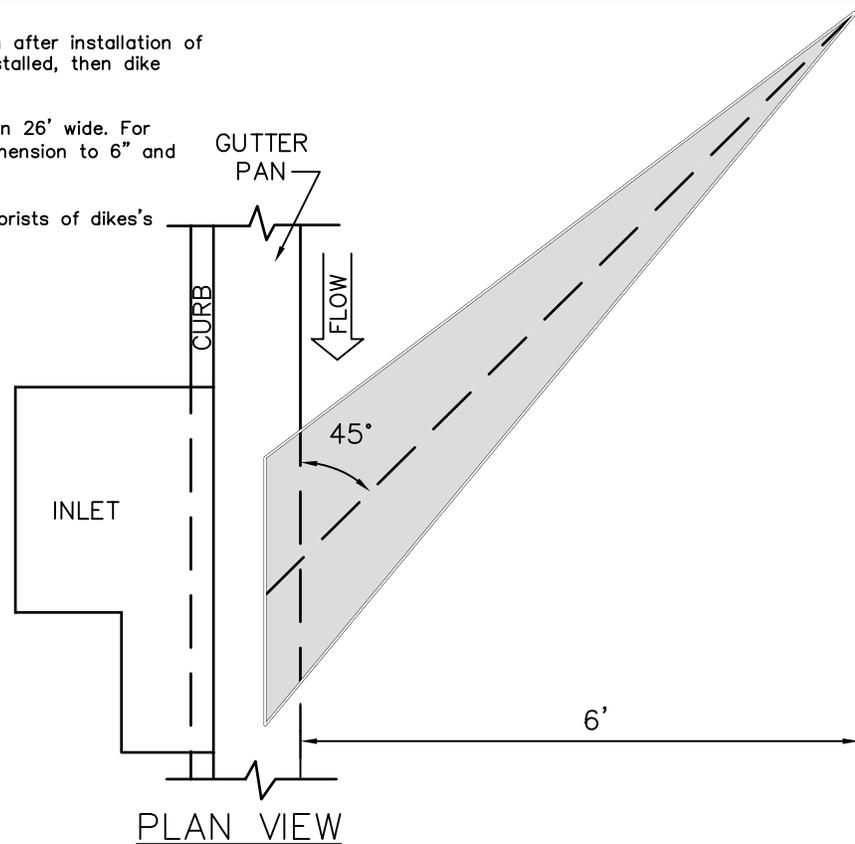

PLAN VIEW



MONTGOMERY COUNTY
DEPARTMENT OF PERMITTING
SERVICES
WATER RESOURCES

TEMPORARY
ASPHALT
DIKE

— AD — AD —

DATE: 7/03

REV: Feb 1997

SCALE: NONE