


CONSTRUCTION EXIT WITH CLEAN-OUT RACKS

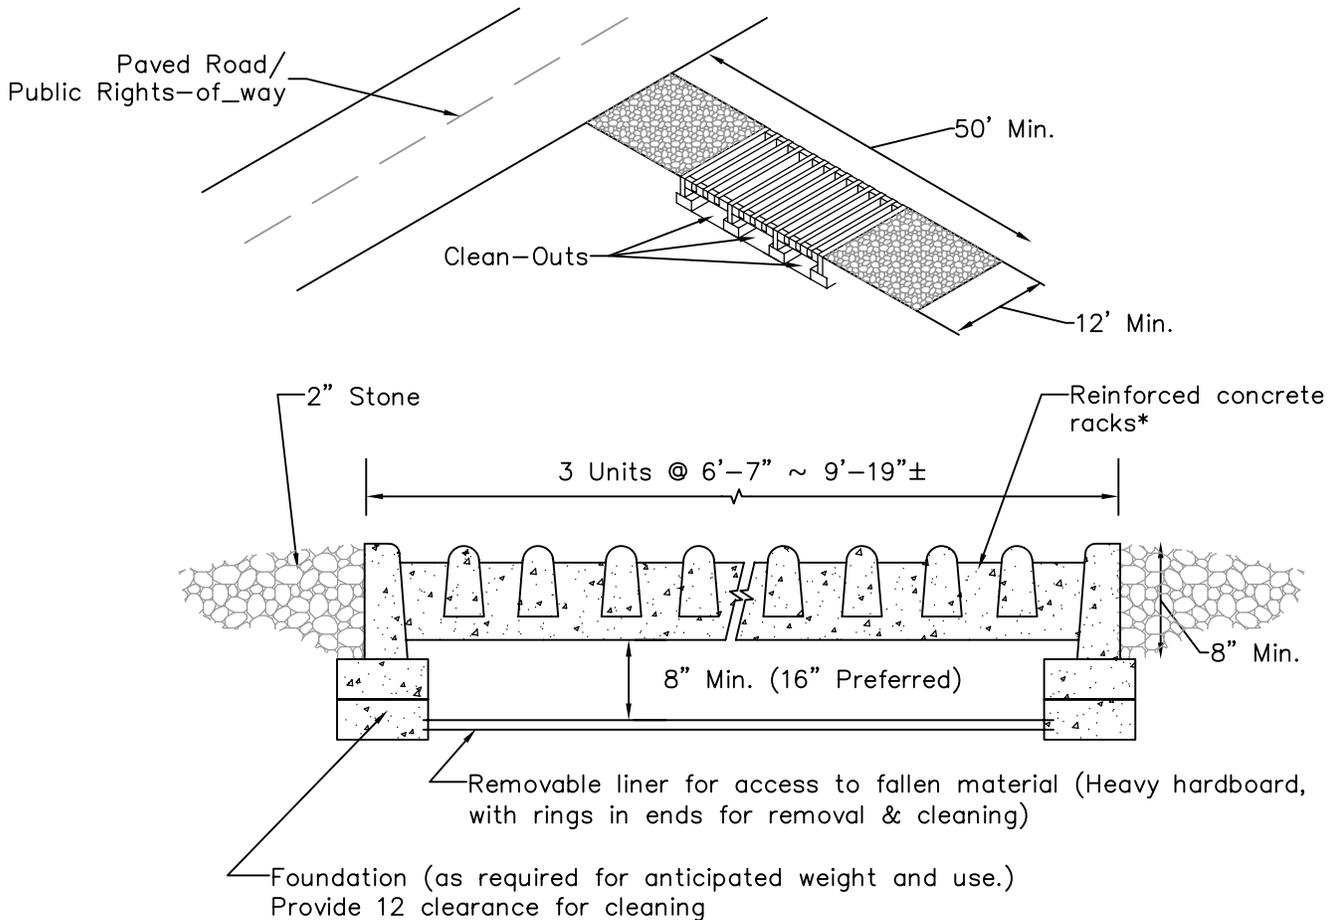

* Source: Smith Cattleguard Company, Midland Virginia or Equal.

MAINTENANCE

The exit shall be maintained in a condition which will prevent tracking or flow of mud onto public rights-of-way. This may require periodic top dressing with 2 inch stone, as conditions demand; and repair and/or cleanout of the structures used to collect fallen material. All materials spilled, dropped, washed or tracked from vehicles onto roadways shall be removed immediately.

USE

On sites where excessive hauling (300 loads or more) is anticipated. For dry use provide cleanouts as shown and maintain as directed. When use for washing mud from vehicles before leaving site, modify and lead runoff to a sediment basin or device as directed.



**MONTGOMERY COUNTY
DEPARTMENT OF PERMITTING
SERVICES
WATER RESOURCES**

**CONSTRUCTION
ENTRANCE
TRUCK WASH RACK**

DATE: 6/03

SCALE: NONE